


BOMAG

REVERSIBLE VIBRATORY PLATES BPR 25/40, BPR 25/50

PERFORMANCE DATA

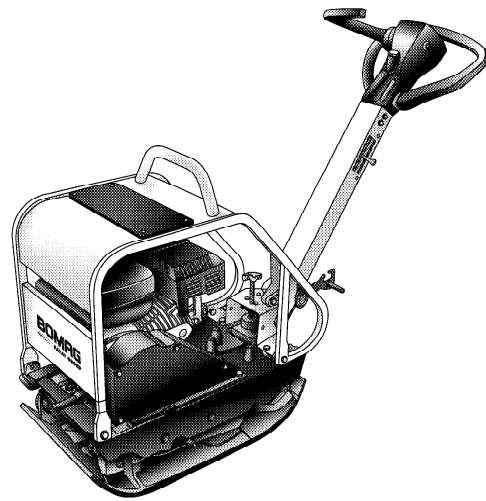

Machine type	Compaction output (m ³ /h) at recommended soil layer thicknesses			
	Rock fill	Gravel, sand	mixed soil	Silt, clay
BPR 25/40	-	15-24	13-20	8-12
BPR 25/50	-	15-24	13-20	8-12

BOMAG

Technical Data

Shipping dimensions in m³


BPR 25/40	0,385
BPR 25/50	0,482

Standard Equipment

- Engine protection frame
- Hydraulic travel lever adjustment
- Vibration dampened steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear resistant base plate with reinforced edges
- Fully protected V-belt
- Lifetime lubricated vibration bearings
- Reinforced centrifugal clutch
- Large-volume dry air filter with cyclone-type precleaner
- Maintenance-free transistor ignition
- Recoil starter

Optional Equipment

- Tool kit
- Special painting
- Vulcolan mat
- Sprinkler system
- Transport device

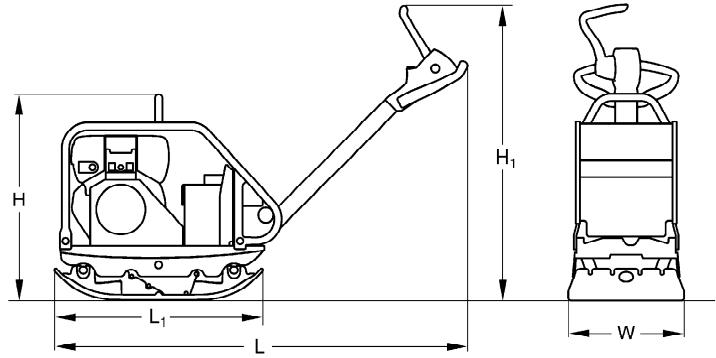

Dimensions in mm

	H	H1	L	L1	W
BPR 25/40	660	870	1460	650	400
BPR 25/50	660	870	1460	650	500

Technical Data

Weights

Operating weight CECE (W)	kg	111	
Basic weight	kg	108	

Dimensions

Basic working width	mm	400	
Lowest passing height	mm	660	

Driving Characteristics

Working speed, max.	m/min	25	
Max. gradeability (depending on soil conditions)	%	30	

Drive

Engine manufacturer		Honda	Honda
Type		GX 160	GX 160
Cooling		air	air
Number of cylinders		1	1
Performance ISO 9249	kW	4	4
Speed	min-1	3.600	3.600
Drive system		mech.	mech.
Fuel		gasoline	gasoline

Exciter system

Frequency	Hz	85	85
Centrifugal force	kN	25	25

Capacities

Fuel	l	3	3
------------	---	---	---

Technical modifications reserved. Machines may be shown with options.

BOMAG BPR 25/40

BOMAG BPR 25/50

BOMAG

BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090
Fax (0)6742 - 3090

