


BOMAG

TANDEM VIBRATORY ROLLERS BW 100 AD-4, BW 120 AD-4, BW 125 AD-4

PERFORMANCE DATA

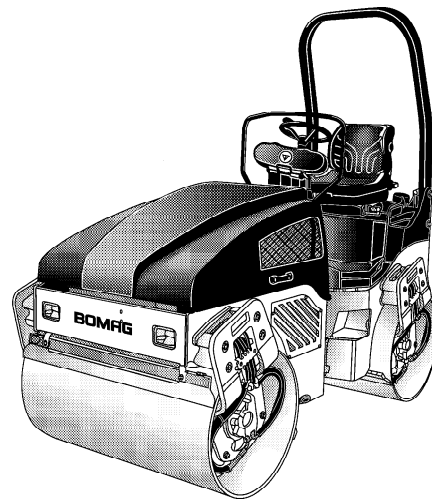

Machine type	Compaction output (m ³ /h) at recommended soil layer thicknesses		
	Gravel, sand	mixed soil	Silt, clay
BW 100 AD-4	80-145	55-105	38-73
BW 120 AD-4	85-170	65-125	43-85
BW 125 AD-4	90-185	70-140	50-95


Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	2-4 cm	6-8 cm	10-12 cm
BW 100 AD-4	15-40	40-60	60-100
BW 120 AD-4	20-45	40-70	70-120
BW 125 AD-4	25-50	45-80	75-130

BOMAG

TECHNICAL DATA

Shipping dimensions in m3

	without ROPS	with ROPS
BW 100 AD-4	4,784	6,618
BW 120 AD-4	5,673	7,848
BW 125 AD-4	5,673	7,848

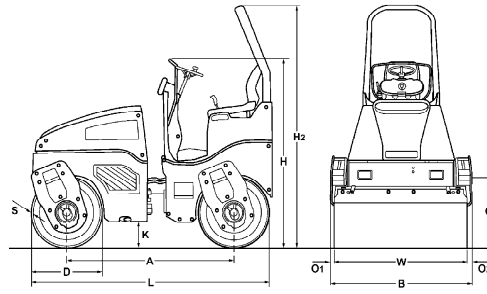

Standard Equipment

- Oscillating artic. center joint
- 2 scrapers per drum
- Suspended operator's platform
- Plastic water tank
- Hour meter
- Lockable engine cover
- Lockable anti vandal dashboard protection
- Transport lashing and lifting points front/rear
- Emergency stop button
- Vibration cut-off, rear drum
- Back-up alarm
- Water level
- Gravity water sprinkler system

Optional Equipment

- * ROPS with safety belts
- * Working lights front/rear
- * Seat with contact switch
- Edge cutter
- Indicator and hazard lights
- Rotary beacon
- Biodegradable hydraulic oil
- Special paint
- Tool kit
- Double travel lever (Sliding seat)
- Foldable ROPS
- Laterally sliding seat
- Fuel level indicator
- Single point lifting device
- Pressure sprinkler system

* Standard delivery with CE conformity (valid within European Union)


DIMENSIONS IN MM

	A	B	C	D	H	H2	K	L	O	S	W
BW 100 AD-4	1728	1076	475	700	1800	2490	250	2470	38	13	1000
BW 120 AD-4	1728	1276	475	700	1800	2490	250	2470	38	13	1200
BW 125 AD-4	1728	1276	475	700	1800	2490	250	2470	38	22	1200

TECHNICAL DATA

	BOMAG BW 100 AD-4	BOMAG BW 120 AD-4	BOMAG BW 125 AD-4
Weights			
Operating weight w. ROPS CECE	kg 2.400	2.600	3.150
Average axle load CECE	kg 1.180	1.300	1.575
Average static linear load CECE	kg/cm 11,8	10,8	13,1
Dimensions			
Length with ROPS	mm 2.470	2.470	2.470
Track radius, inner	mm 2.720	2.620	2.620
Driving Characteristics			
Max. working speed with vibration	km/h 0- 6,5	0- 6,5	0- 6,5
Max. travel speed	km/h 0- 12,0	0- 12,0	0- 12,0
Max. gradeability without/with vibr.	% 40/30	40/30	35/25
Drive			
Engine manufacturer	Kubota	Kubota	Kubota
Type	D 1703 MDI	D 1703 MDI	D 1703 MDI
Cooling	water	water	water
Number of cylinders	3	3	3
Performance ISO 9249	kW 25,2	25,2	25,2
Speed	min-1 2.600	2.600	2.600
Performance SAE J 1349	kW 25,2	25,2	25,2
Speed	min-1 2.600	2.600	2.600
Speed adjustment 1	min-1 2.200	2.200	2.200
Speed adjustment 2	min-1 2.700	2.700	2.700
Electric equipment	V 12	12	12
Brakes			
Service brake	hydrost.	hydrost.	hydrost.
Parking brake	hydromec.	hydromec.	hydromec.
Steering			
Steering system	oscil.artic.	oscil.artic.	oscil.artic.
Steering method	hydrost.	hydrost.	hydrost.
Steering angle +/-	grad 30	30	30
Oscillating angle +/-	grad 12	12	12
Exciter system			
Vibrating drum	front + rear	front + rear	front + rear
Drive system	hydrost.	hydrost.	hydrost.
Frequency	Hz 60/70	60/70	50/60
Amplitude	mm 0,50	0,52	0,40
Centrifugal force	kN 23/38	28/45	29/42
Sprinkler System			
Type of sprinkling	gravity	gravity	gravity
Capacities			
Fuel	l 40	40	40
Water	l 220	220	220

Technical modifications reserved. Machines may be shown with options.



BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090
Fax (0)6742 - 3090

BOMAG